

# SIMULATED SEMI-RECESSED

## PLF8SM, PLF14SM

### Suggested Specification

Models PLF8SM shall deliver 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Models PLF14SM shall deliver 14.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Cabinet finish shall be Powder Coated Paint or brushed stainless steel. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1. Shall be listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.

### Models

**PLF8SM** delivers 8 gph of chilled drinking water.

**P8FPMCD** delivers 14 gph of chilled drinking water.

### Standard Features

- Waterways are Lead-Free in material & Construction
- Dial-A-Drink® Bubblers
- Stainless Steel Top
- Welded, Heavy-Gauge Steel Frame
- High-Efficiency Cooling Tank and Coil
- Refrigerant 134a
- Limited 5-Year Warranty



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.



### Finishes

- Standard Cabinet Finish: Sandstone Powder Coated paint
- Optional finish at extra cost: Stainless Steel, Regency Bronze.


### Installation

- Prior to roughing-in, consult local, state and federal codes for proper mounting height.
- Shipped with complete instructions and wall mounting bracket.
- Removable panels provides easy access for installation.

**Limited 5-Year Warranty** (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most components parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

**Export Warranty:** One year on the sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each water cooler; sample available upon request.


Models covered by this specification complies with all known Plumbing Codes. Listed by Underwriter's Laboratories to U.S. and Canadian standards and conform to European Union Directives.



Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot'N Cold™ Model	115 Volts, 60HZ			Glass Filler Acc. Option	Cabinet Color Option	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF8SM	8.0	8.0	NO	NO	1/5	4.3	390	NO	YES	67 Lbs.
PLF14SM	14.0	8.0	YES	NO	1/5	4.3	390	NO	YES	67 Lbs.

\*Air Conditioning and Refrigerant Institute Standard Rating Condition 80° F inlet water temperature.


OASIS® SIMULATED SEMI-RECESSED WATER COOLER MODELS PLF8SM, PLF14SM

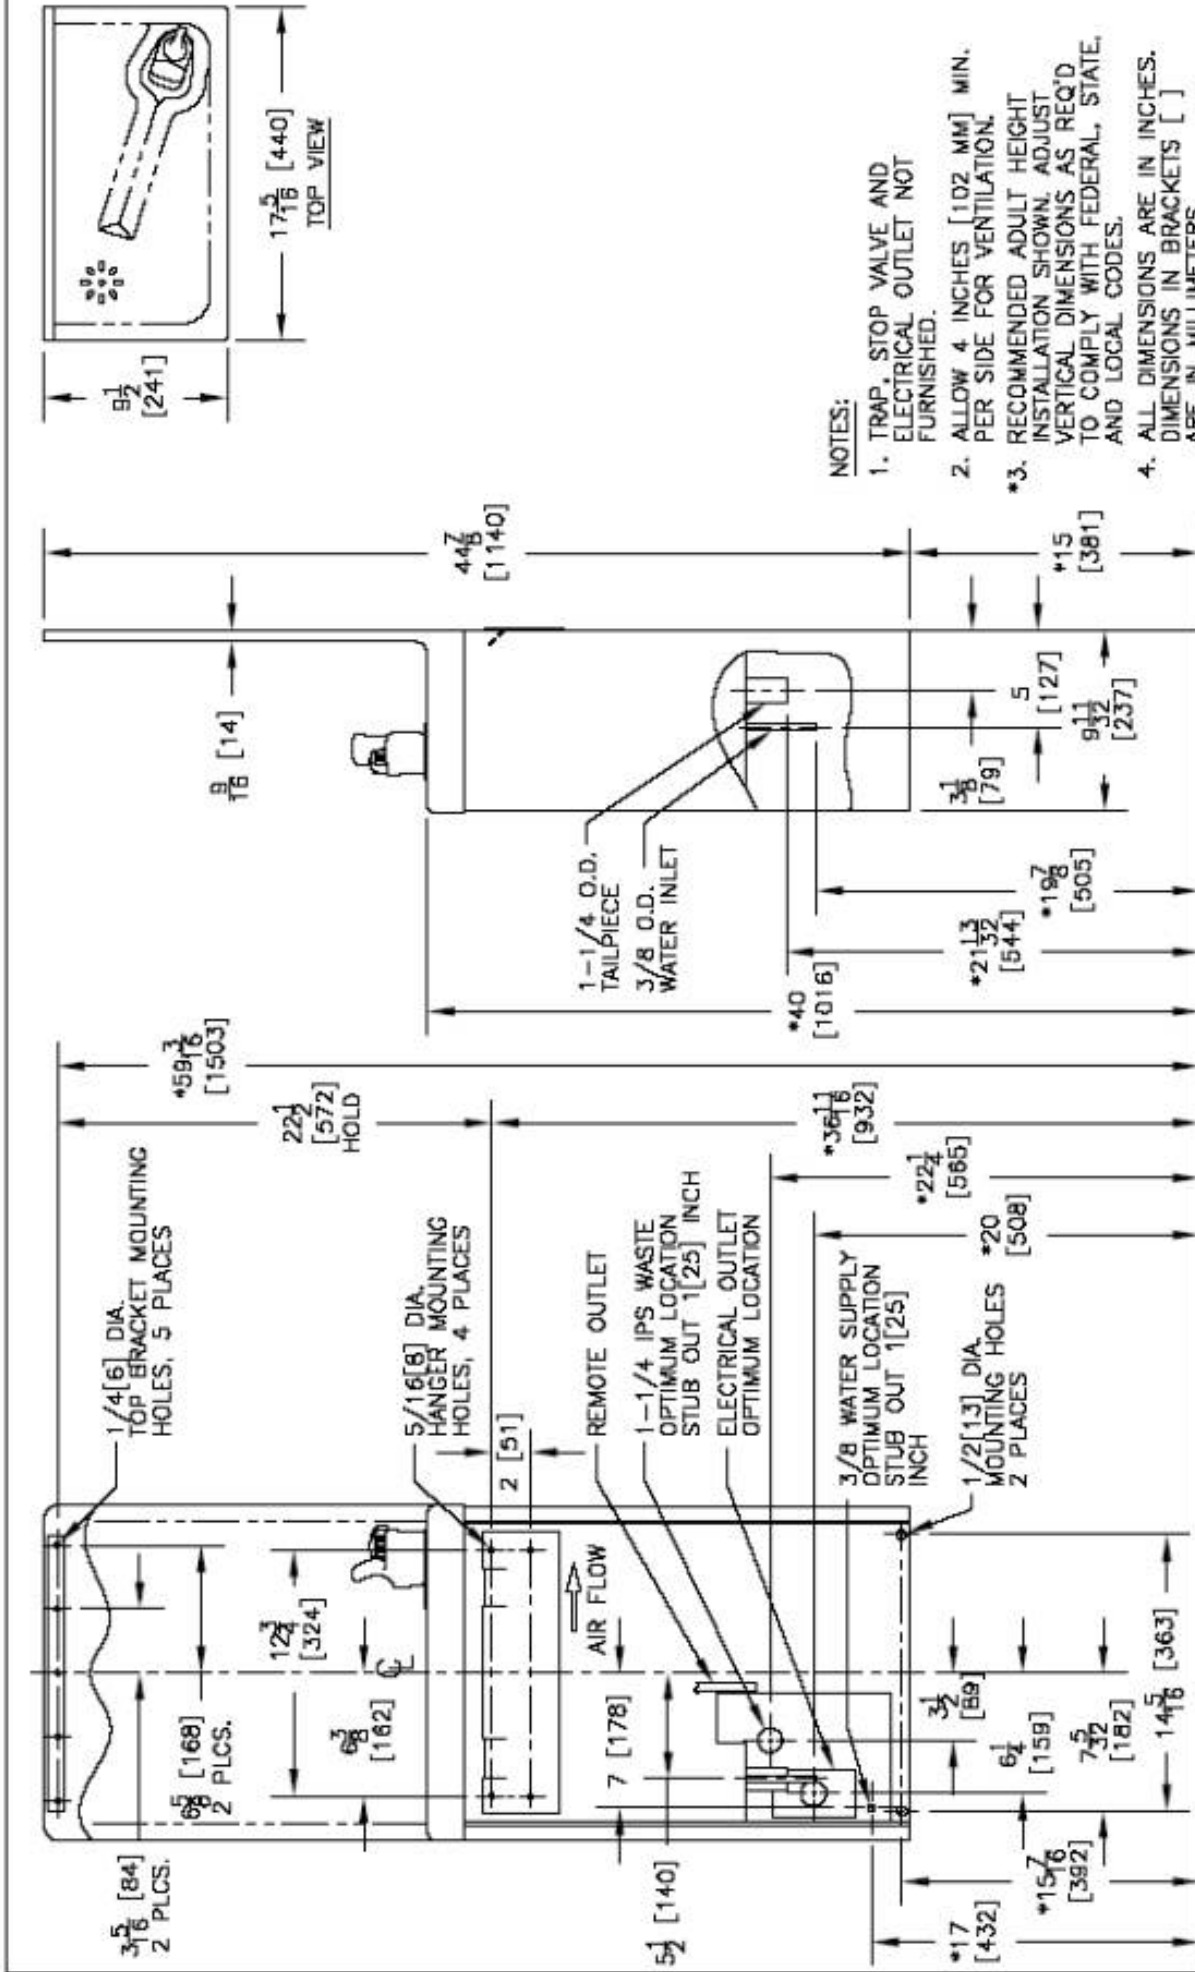

NOTES:

1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.

AAA BestWater Co.  
454-2666



ROUGHING-IN  
AND  
DIMENSIONAL DRAWING